

# JET-shear

## High Shear In-tank Mixing

Efficiently and consistently emulsify, dissolve and disperse ingredients within your process. The JET-shear has propellers at the top and bottom of the work head that draws in material while centrifugal force moves the media out creating a mechanical shear. Reduce processing time, increase quality and consistency of the blend, and increase throughput with the JET-shear.

Ampco's in-tank mixers are used to hydrate, homogenize, disperse and emulsify products covering a wide range of applications in food, chemical, and pharmaceutical industries. The multiple interchangeable stainless steel work heads are designed for 3A and CIP. The JET-shear can be used in open and closed tanks, drums or tote processing up to 1000 gallons/ 3785 liters.

### JET-shear Features

- Emulsion to less than 10 microns
- Max volumes up to 1000 gallons
- 316 stainless steel shaft
- 304 stainless steel bearing frame
- Multiple 316 stainless work head styles available
- Work heads can be interchanged
- Designed to 3A standards
- CIP-able
- Multiple mounting configurations
- Multiple shaft lengths
- Custom options available



### HIGH SHEAR IN-TANK MIXING & BLENDING



DISTRIBUTED BY




**HARCO**  
**ENTERPRISES LTD.**  
1-800-361-5361



PRODUCT SPECIFICATIONS

Standard Bearing Frame Sizes	Max Shaft Length	Standard Shaft Diameter	Workhead Diameter
JS125	48" / 122cm	1.25" / 31.75mm	2.5" / 63.5mm
JS150	48" / 122cm	1.5" / 38.1mm	4.0" / 101.6mm
JS225	96" / 244cm	2.25" / 57.15mm	5.0" / 127mm

\* Custom options are available; contact Ampco Pumps for additional information

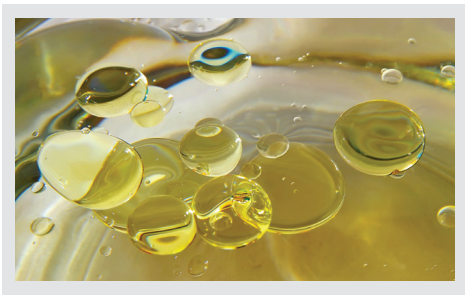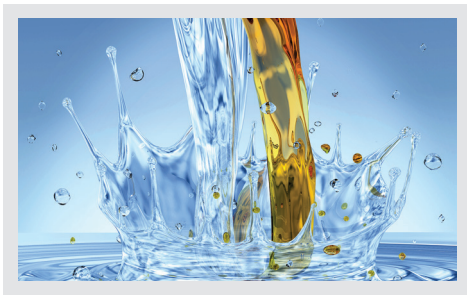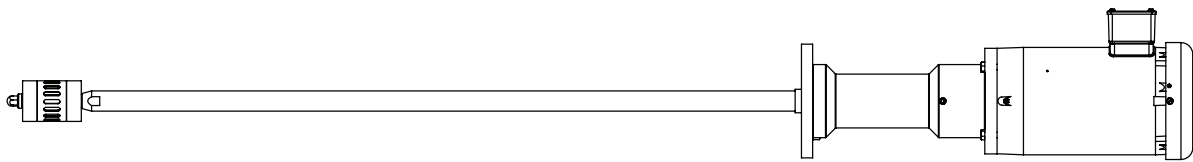

**Ampco Pumps**  
Company

2045 W. Mill Road  
Glendale, WI 53209  
Phone: 800.737.8671  
[www.ampcopumps.com](http://www.ampcopumps.com)

Am Gäxwald 6  
76863 Herxheim Germany  
Phone: +49 7276 5058515  
[info@ampcopumps.de](mailto:info@ampcopumps.de)

**Ampco Pumps**  
GmbH