



DISTRIBUTED BY



ENTERPRISES LTD.

1-800-361-5361

Alfa Laval MultiMagnum

Rotary Spray Head

Introduction

The Alfa Laval MultiMagnum is a rotary spray head tank cleaning machine for hygienic environments. Designed to clean tanks from 1,321-10,567 US gallons.

The Alfa Laval MultiMagnum minimizes the consumption of water and cleaning media. Easy to customize to meet customer requirements, the MultiMagnum allows companies to spend less time cleaning and more time producing.

Application

The Alfa Laval MultiMagnum is designed for the removal of residues from hygienic tanks across the dairy, brewery, distillery, beverage, food, IBC (intermediate bulk container), personal care and many other industries.

Benefits

- 40% faster cleaning = more time for production
- Saves up to 40% of your cleaning cost
- Dynamic cleaning performance and 360° full wetting
- Easy to retrofit traditional spray balls to a more economical solution
- Can be installed at any angle

Standard design


Different choice of spray pattern suitable for various applications and tank designs, ranging from simple tanks to more complex tanks with structure such as agitator and baffles. The MultiMagnum is lubricated by the cleaning media.

Working principle


The flow of the cleaning media causes the head of the Alfa Laval MultiMagnum to rotate, and the fan-shaped jets layout a swirling pattern throughout the tank or reactor. This generates the wetting/impact needed for the efficient removal of the residual product; the cascading flow covers all internal surfaces of the vessel.




Spray Pattern



360°



270° up



180° down

Certificates

2.1 material certificate.



TECHNICAL DATA

Lubricant:	Self-lubricating with the cleaning fluid
Wetting radius:	Max. 10 ft
Impact cleaning radius:	Max. effective 6 ft

Pressure

Working pressure:	14.5 - 44 PSI
Recommended pressure:	29 PSI

PHYSICAL DATA

Materials¹

Inlet connections/Balls:	316 (UNS S31600)
Bearing race parts:	Duplex steel (UNS S31803)
Head:	316 (UNS S31603)

¹ FDA compliance 21CFR§177

Surface finish

Standard Surface finish:	Ra 32 µin outside / Ra 32 µin inside
Exterior:	Ra 32 µin
Internal:	Ra 32 µin

Temperature

Max. working temperature:	203 °F
Max. ambient temperature:	284 °F

Weight

Thread:	1.98 lbs
On pipe:	5.51 lbs


Connections

- Thread: 1 1/4" Rp (BSP) or NPT
- Weld-on: 1 1/2" ISO 2037 or DN40 DIN11850-R2


Caution

Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.

Flow Rate

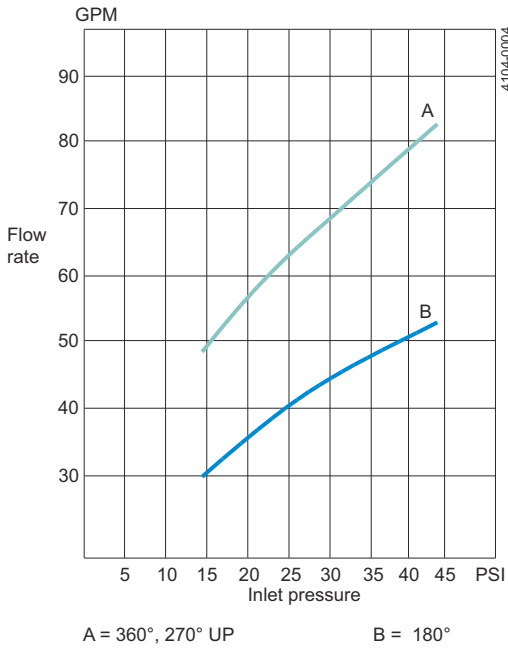

Cleaning radius

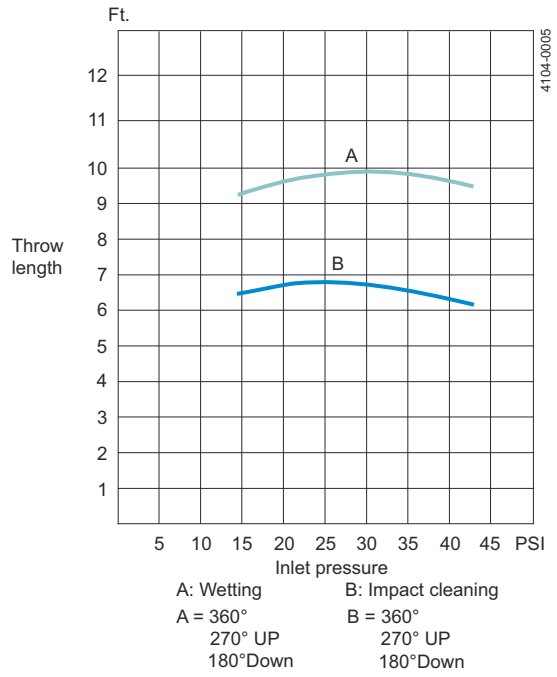

Dimensions (inch)

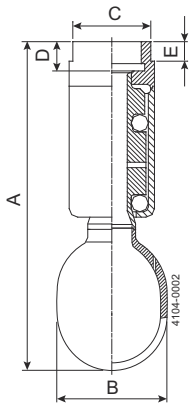


Figure 1. Thread

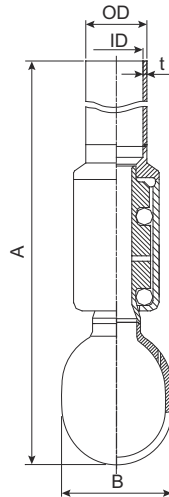


Figure 2. Weld-on

TH

1 1/4" Rp (BSP)
 1 1/4" NPT

OD x t

Welded on pipe

ISO: Ø1.50 x 0.047 inch
 DN40: Ø1.61 x 0.059 inch

Type	A	B	C	D	E
Thread	7.20	Ø2.56	1.81	0.63	0.59
Weld-on	39.37	Ø2.56			

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200006908-1-EN-US

© Alfa Laval Corporate AB

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com

DISTRIBUTED BY
HARCO
ENTERPRISES LTD.
1-800-361-5361

