



Since 1964

PHARMACEUTICAL PRESSURE GAUGES CATALOG



www.harcosupply.com





Supply House to the Processing Industries Since 1964

Trusted supply house of sanitary processing equipment, parts and supplies for the dairy and food, brewery, beverage and pharmaceutical industries.

Harco Enterprises offers a diverse line of sanitary and hygienic processing equipment, parts and supplies including pumps, sanitary valves, separators, homogenizers, gaskets and fittings, sanitary hoses, and instrumentation as well as a variety of other products from world leading manufacturers such as Alfa Laval, Ampco, Tetra Pak, Burkert, Tri-Clover, Remco, Vikan, Carlisle, Haynes, Strahman, and more.

These products are distributed to dairy, food, beverage processing facilities as well as the pharmaceutical, brewing, and fisheries industries throughout North America.

Many of our products are customized in design due to strict sanitary and hygienic standards, and all are built to stand up to the demands of high production environments. Resourcefulness and quick delivery are important to you, and Harco always provides both.

Check out our large collection of equipment, parts and supplies, including our line of color-coded products available.

Visit our website today at www.harcosupply.com

Pharmaceutical Pressure Gauges

PHARMA-FLOW

Designed to withstand the strict requirements of pharmaceutical processing environments, the Pharma-Flow Pressure Gauge provides reliable, long-term performance with little or no maintenance. Its durable construction makes it well suited for sanitary applications across a range of processing industries.

Typical Industries:

- Pharmaceutical & Biotechnology
- Food & Beverage
- Meat / Poultry
- Distillery & Winery
- Cosmetic

SPECIFICATIONS

Compliance	ANSI / 3-A, NEMA 4X, IP67
Accuracy	±0.75% of Full Scale
Over Range Capability	30% Over Range
Product Contact Material	316L Stainless Steel
Product Contact Finish	$R_{2max} = 8\mu\text{in}$ (0.20 μm)*
Case & Lens Ring Material	304 Stainless Steel
Dial Size	2½" (63mm), 3½" (90mm) or 5" (120mm) Dia.
Lens Material	1/4" Polycarbonate
Repeatability/Linearity/Hysteresis	±0.5% of Full Scale
Process Temperature Range	10° to 250°F (-12° to 121°C)*
Ambient Operating Limits	25° to 160°F (-4° to 71°C)
Ambient Storage Limits	0° to 250°F (-18° to 121°C)
Standard Fill	Food Grade Glycerine
Rezero Feature	Standard on Pointer
Approx. Shipping Weight (2½")	1 Pounds (0.5 Kg)
Approx. Shipping Weight (5")	5 Pounds (2.3 Kg)
Approx. Shipping Weight (3½")	3 Pounds (1.4 Kg)

FEATURES

316L Stainless Steel Sanitary Fittings & Diaphragm assures maximum corrosion resistance while providing the most sanitary construction possible.

Totally Flush Diaphragm with a mirror-like finish and no sharp corners makes this the industry's most sanitary pressure gauge available.

304 Stainless Steel Case for durability even in the roughest environments.

Polycarbonate Lens is virtually impervious to cracks and breakage.

Waterproof Construction throughout allows gauge to be submersed for cleaning.

C.I.P. - can be cleaned in place for convenience and to eliminate the possibility of damage from mishandling.

Pressure Ranges from 30" Hg vacuum to 1,000 psi.

True Zero with Re-Zero Feature is standard on all gauges.

Unique Pulsation Dampening System eliminates pointer oscillations and insulates the gauge movement from pulsations which shorten the life of an ordinary pressure gauge.

Glycerine Fill is standard to protect the gear mechanism against wear and vibration.

350°F Maximum process temperatures (176°C).*

Immediate Availability from stock for all pressure gauges.

Experienced Engineers are available to answer questions and solve difficult application problems.

Unparalleled Customer Service where the customer is always right and we are not happy until the customer is satisfied. No restocking charges plus 30 day no-risk trials are always available.

AVAILABLE RANGES (psi)

0 to 30	0 to 300	30"-0-60
0 to 60	0 to 400	30"-0-100
0 to 100	0 to 600	30"-0-150
0 to 160	0 to 1,000	30"-0-200
0 to 200	30"-0-30	30"-0-300

Standard scales are in PSI only, dual PSI/BAR and other scales available upon request.

AVAILABLE FITTINGS

Tri-Clamp®, Cherry-Burrell "I" Line, Cherry-Burrell "Q", APC "K" Clamp, G&H "H" Line.

For other fittings please consult Harco.

(1) +/- 1% of full scale with 3/4" Tri-Clamp fitting

(2) For other diaphragm material options – please consult factory or see website configurator


(3) Not applicable for ¾" tri-clamp fitting

(4) High Temperature Option increases maximum process temperature to 350°C (176°F)


Tri-Clamp is a registered trademark of Tri-Clover, Inc.



Pharmaceutical Pressure Gauges

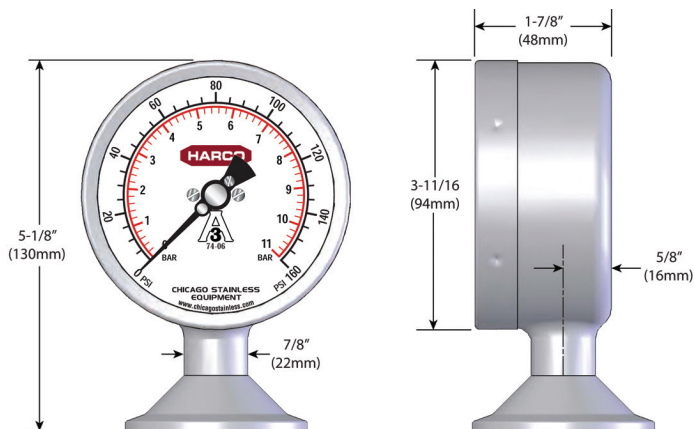

3-1/2" BOTTOM MOUNT
(Shown with 2" Tri-Clamp)

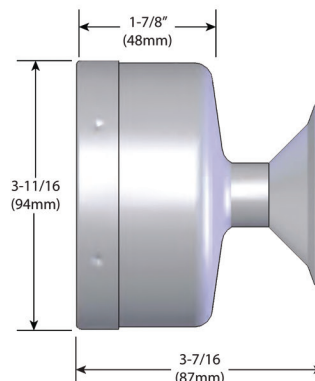


3-1/2" BACK MOUNT
(Shown with 2" Tri-Clamp)




3-1/2" LEFT SIDE MOUNT
(Shown with 1-1/2" Male I-Line)




3-1/2" TOP MOUNT
(Shown with 2" Male I-Line)

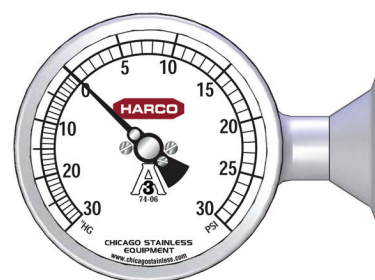

3-1/2" RIGHT SIDE MOUNT
(Shown with 1-1/2" Tri-Clamp)

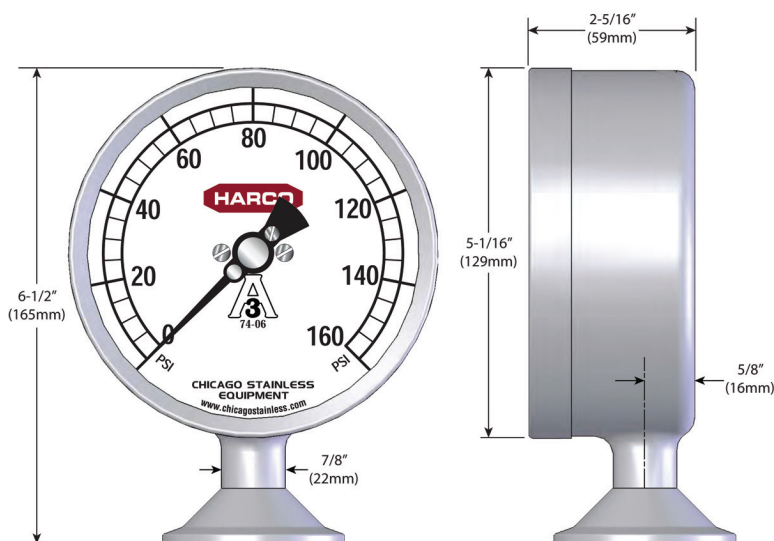

5" BOTTOM MOUNT
(Shown with 2" Tri-Clamp)

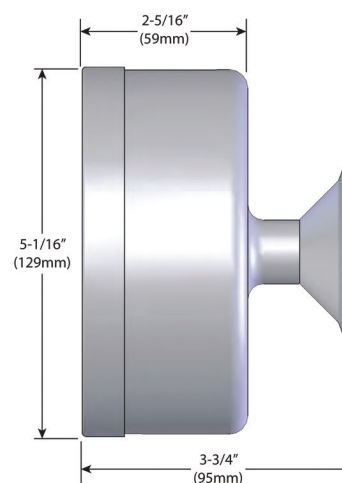

5" BACK MOUNT
(Shown with 2" Tri-Clamp)

Pharmaceutical Pressure Gauges

ORDERING INFORMATION

Below are typical examples of models with their descriptions.

EXAMPLE 1:

3P - E - 2U - GF - BT

Describes a 3½" Pharma-Flow Pressure Gauge, 0 to 160 psi, 2" Tri-clamp fitting, glycerine filled case, bottom mount.

EXAMPLE 2:

3P - DB - 15U - GF - BK

Describes a 3½" Pharma-Flow Pressure Gauge, 0 to 100 psi/0 to 7 BAR, 1½" tri-clamp fitting, glycerine filled case, back mount.

EXAMPLE 3:

3P - M - 2H - GF - LF

Describes a 3½" Pharma-Flow Pressure Gauge, 30" Hg to 30 psi, 2" G&H "H" line fitting, glycerine filled case, left side mount.

EXAMPLE 4:

5P - GK - 25I - GF - RT

Describes a 5" Pharma-Flow Pressure Gauge, 0 to 300 psi/0 to 28 Kg/cm², 2½" male I-line fitting, glycerine filled case, right side mount.

MODEL NUMBER CONSISTS OF:

SERIES	PRESSURE RANGE	FITTING	FILLED CASE	MOUNT
3P	D	2U	GF	GF

Please make a selection from each category below:

SERIES

- 2P 2½" (63mm) Pharma-Flow Pressure Gauge
 3P 3½" (90mm) Pharma-Flow Pressure Gauge
 5P 5" (120mm) Pharma-Flow Pressure Gauge

PRESSURE RANGE*

- B 0 to 30 psi (2 BAR)
 C 0 to 60 psi (4 BAR)
 D 0 to 100 psi (7 BAR)
 E 0 to 160 psi (11 BAR)
 F 0 to 200 psi (14 BAR)
 G 0 to 300 psi (21 BAR)
 H 0 to 400 psi (28 BAR)
 I 0 to 600 psi (41 BAR)
 K 0 to 1,000 psi (70 BAR)
 M 30" Hg to 30 psi (-1 to 2 BAR)
 N 30" Hg to 60 psi (-1 to 4 BAR)
 O 30" Hg to 100 psi (-1 to 7 BAR)
 P 30" Hg to 150 psi (-1 to 10 BAR)
 Q 30" Hg to 200 psi (-1 to 14 BAR)
 R 30" Hg to 300 psi (-1 to 21 BAR)

*Standard scales are in PSI only. For dual scales, after the pressure range add letter B for PSI/BAR, K for PSI/Kg/cm², P for PSI/KPa.

FITTINGS

(Fittings available in 1½", 2", 2½", 3")

- H G&H "H" Line Male
 I Cherry-Burrell Male I-Line
 K APC "K" Clamp
 Q Cherry-Burrell "Q"
 U Tri-Clamp®


(Specify size, then fitting type such as 1½"U for a 1½" Tri-Clamp fitting.)

FILLED CASE

- GF Glycerine Filled
 NF No Fill (Dry Case)
 04 Other (Specify)

MOUNT

- BT Bottom Mount
 RT Right Side Mount
 LF Left Side Mount
 TP Top Mount
 BK Back Mount

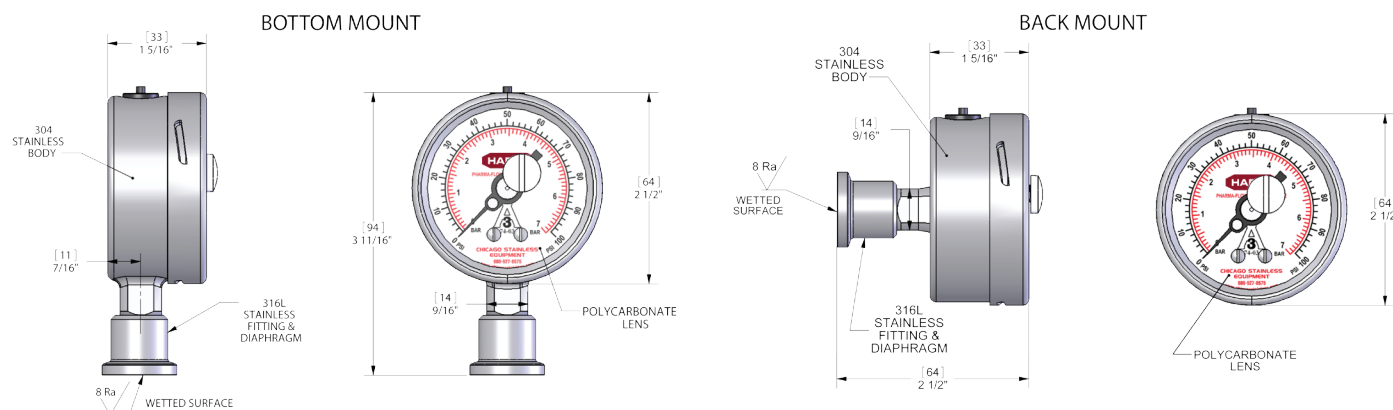



Product Line Card

Supply House to the Processing Industries Since 1964

Harco partners with leading manufacturers in the industry to bring you an innovative range of sanitary and hygienic processing equipment and supplies. With experience in design, manufacturing and support, our partners are selected for their quality, reliability, and advanced products.



www.harcosupply.com

